




# CADENAS REDLERS

Derivadas de la norma DIN-8164

Serie RS

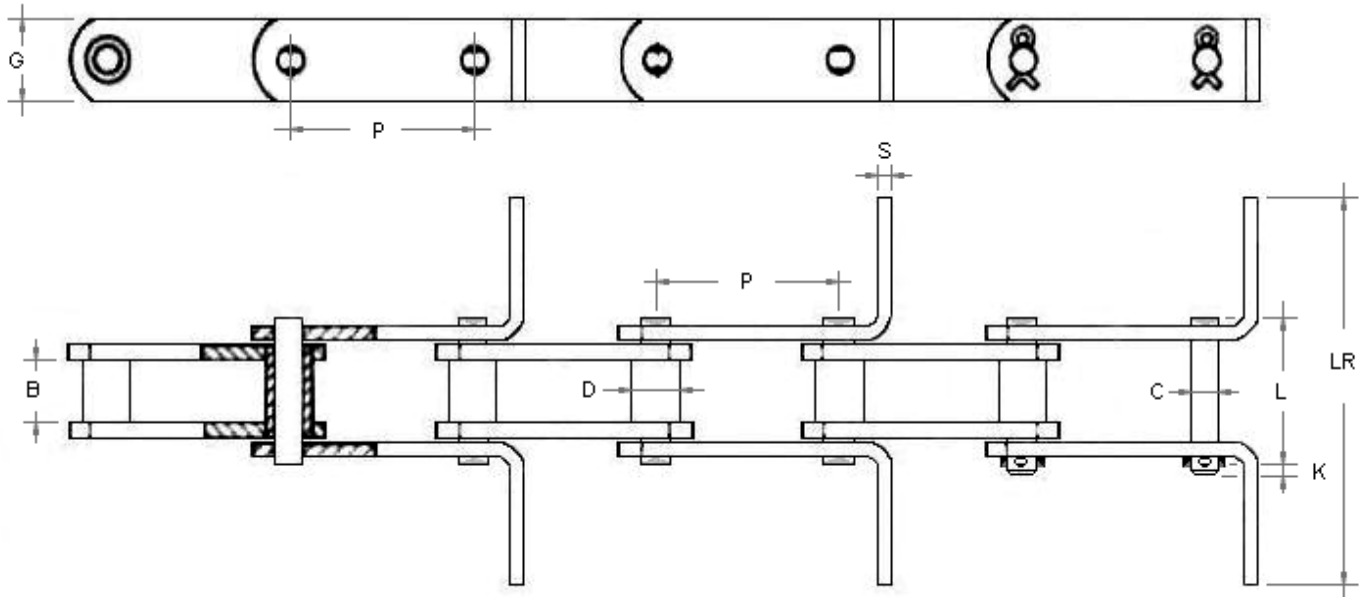

| Ref.<br>Cadena | Carga<br>Rotura<br>Kp. | PASO<br>P |     |     | CADENAS LISAS Serie RS |          |           |        |        |                  |          |          |   |      |       |
|----------------|------------------------|-----------|-----|-----|------------------------|----------|-----------|--------|--------|------------------|----------|----------|---|------|-------|
|                |                        |           |     |     | Ancho<br>Interior      | Ø<br>eje | Ø<br>Casq | BRIDAS |        |                  | ANCHOS   |          | Superficie<br>Articul.<br>cm <sup>2</sup> |      |       |
|                |                        |           |     |     |                        |          |           | Ancho  | Grueso | Ancho<br>Scraper | L        | K        |   |      |       |
|                |                        |           |     |     | B                      | C        | D         | G      | S      | LR               | L<br>max | K<br>max |   |      |       |
| RS-3           | 3.000                  | 100       | 125 | 150 | 18                     | 10       | 15        | 25     | 3      | 105              | 35       | 4        | 2,51                                      |      |       |
| RS-6           | 6.000                  | 100       | 125 | 150 | 175                    | 20       | 11        | 17     | 35     | 4                | 145      | 42       | 4,5                                       | 3,22 |       |
| RS-8           | 8.500                  | 100       | 125 | 150 | 175                    | 200      | 25        | 14     | 20     | 40               | 5        | 170      | 49  | 5    | 5,12  |
| RS-12          | 12.000                 | 100       | 125 | 150 | 175                    | 200      | 30        | 16     | 22     | 45               | 6        | 180      | 63  | 7    | 7,03  |
| RS-16          | 16.000                 | 125       | 150 | 175 | 200                    |          | 35        | 18     | 26     | 55               | 6        | 220      | 68  | 8    | 8,86  |
| RS-25          | 25.000                 | 125       | 150 | 175 | 200                    | 225      | 45        | 20     | 30     | 60               | 8        | 245      | 87  | 9    | 12,76 |
| RS-35          | 35.000                 | 150       | 175 | 200 | 225                    | 250      | 50        | 22     | 32     | 60               | 10       | 270      | 100                                       | 10,5 | 16,12 |